

#### **MILWAUKEE TOOL**

Milwaukee Electric Tool Corporation BROOKFIELD, WI 53005

Tel: +1 (262) 781-3600 • Fax: +1 (262) 790-6333

Milwaukee Asia Office 29/F, Tower 2, Kowloon Commerce Centre, 51 Kwai Cheong Road, Kwai Chung, Hong Kong Tel: +852-2492-2181 • Fax: +852-2490-4778

Distributed by:

20/3/2020

All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes. © 2019 Milwaukee Electric Tool Corporation.

All trademarks are owned by Techtronic Cordless GP unless otherwise stated.

www.milwaukeetool.asia



# DRIVEN TO OUTPERFORM.



M12 FDGS
M12 FUEL
STRAIGHT
DIE
GRINDER

MORE
POWER
THAN
PNEUMATIC

3-MODE SPEED CONTROL


GREATER
MOBILITY
& ACCESS



# **DRIVEN TO OUTPERFORM.**

M12 FUEL is engineered for the most demanding tradesmen in the world. M12 FUEL delivers unrivaled performance in a compact structure and features three MILWAUKEE exclusive innovations - the POWERSTATE Brushless Motor, REDLITHIUM-ION Battery Pack and REDLINK PLUS Intelligence Hardware and Software - that deliver unmatched power, run-time and durability. Simply put, the M12 FUEL Straight Die Grinder is the only cordless straight die grinder that delivers the performance service mechanics and professional metal workers demand.


# M12 FUEL

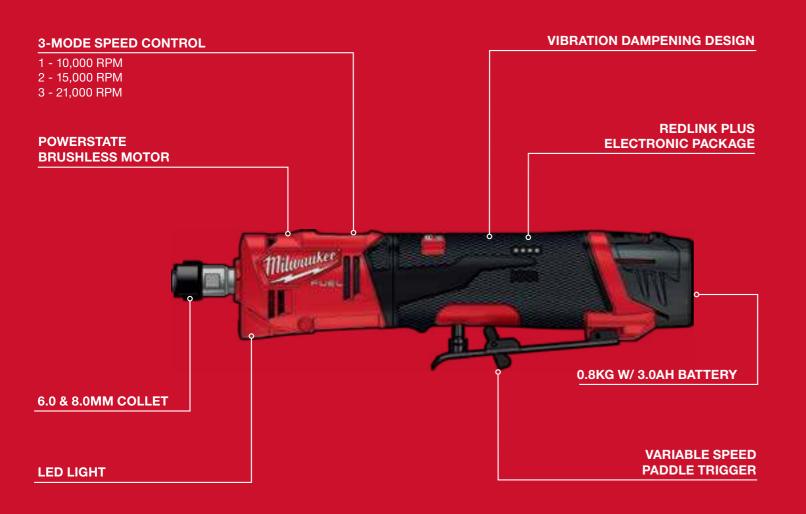

**283MM LENGTH** 


#### M12 FUEL STRAIGHT DIE GRINDER

# MORE POWER THAN PNEUMATIC



 More powerful than pneumatic 0.25 HP die grinders

### 3-MODE SPEED CONTROL



■ Optimized for most common 2" accessories

■ Dial in the right max RPM for safer operation

Variable speed trigger

## GREATER MOBILITY & ACCESS



- No air hoses, compressors, or daily maintenance
- Increased cost savings over pneumatic power

|    |                 | Px               |                | 0                  |               |
|----|-----------------|------------------|----------------|--------------------|---------------|
|    | CARBIDE<br>BURR | BUFFING<br>STONE | FLAP<br>WHEEL* | CUT OFF<br>WHEEL** | WIRE<br>WHEEL |
| 1" | 1               | <b>/</b>         | <b>✓</b>       | N/A                | /             |
| 2" | N/A             | N/A              | <b>✓</b>       | <b>✓</b>           | /             |
| 3" | N/A             | N/A              | X              | X                  | ×             |

\*For best performance, let the tool do the work and apply appropriate pressure as necessary

\*\*For best performance, use high quality and balanced accessories (such as MILWAUKEE or Pferd) while applying appropriate pressure as necessary

### **SPECIFICATIONS**

| DESCRIPTION | SPECIFICATIONS            | DESCRIPTION              | SPECIFICATIONS                         |
|-------------|---------------------------|--------------------------|--|
| Collet Size | 6.0 mm & 8.0 mm<br>283 mm | 3-Mode RPM Control       | 10,000 / 15,000 / 21,000 rpm<br>0.8 kg |
| Length      |                           | Weight (w/3.0Ah battery) |  |