

#### **MILWAUKEE TOOL**

Milwaukee Electric Tool Corporation BROOKFIELD, WI 53005 USA Tel: +1 (262) 781-3600 • Fax: +1 (262) 790-6333

Milwaukee Asia Office 29/F, Tower 2, Kowloon Commerce Centre, 51 Kwai Cheong Road, Kwai Chung, Hong Kong Tel: +852-2492-2181 • Fax: +852-2490-4778

Distributed by:

M18 FUEL TRIM

**ROUTER** 

M18 FTR

POWER

**FAST ACCURATE DEPTH ADJUSTMENTS** 

**CUTS UP TO 76M** 



# M18 FUEL

**DRIVEN TO OUTPERFORM.** 



**POWERSTATE BRUSHLESS MOTOR** 

**REDLITHIUM-ION BATTERY PACK** 

30/09/2019

All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes. Copyright 2019 - Milwaukee Electric Tool Corporation

www.milwaukeetool.asia

## M18 FUEL

## **DRIVEN TO OUTPERFORM.**

M18 FUEL is engineered for the most demanding tradesmen in the world. Delivering unrivaled performance, all M18 FUEL products feature three Milwaukee-exclusive innovations - The POWERSTATE Brushless Motor, REDLITHIUM-ION Battery Pack and REDLINK PLUS Intelligence Hardware and Software - that deliver unmatched power, run-time and durability on the jobsite. Simply put, M18 FUEL tools are the most powerful 18V cordless tools in their class.

## 

#### **ON/OFF SWITCH**

■ Easily accessible from multiple hand positions

#### MICRO ADJUST DIAL

■ Provides accurate micro adjustments down to 1/64"

#### SPINDLE LOCK BUTTON

■ Fast easy bit changes with only one wrench

#### **DUAL LED LIGHTS**

■ Better visibility

#### **REDLINK PLUS INTELLIGENCE**

 Communication between battery and motor for maximum power and efficiency

#### POWERSTATE BRUSHLESS MOTOR

■ Corded Performance; generates up to 1.25HP and up to 31,000 RPM

#### **COLLET DIAMETER 6 MM OR 1/4"**

■ Common collet size means bits are easy to find

#### ACCEPTS DUST SHROUD

Easily connect a dust shroud to manage dust during cuts

#### STANDARD ACCESSORIES





#### **MACRO ADJUST BUTTON**

■ Fast and simple coarse adjustments




### MAXIMUM POWER





## FAST ACCURATE DEPTH ADJUSTMENT

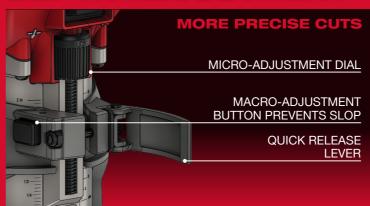



## CUTS UP TO 76M





### **SPECIFICATIONS**

DESCRIPTION	SPECIFICATIONS
No load speed	10,000 - 31,000 rpm
Motor	Brushless
Max. bit diameter	38 mm
Collet diameter	6 mm or 1/4" (6.35 mm)

DESCRIPTION	SPECIFICATIONS
Bit Brake	Yes
LED	Yes
Dust Shroud	Yes
Weight (w/ 5.0 Ah battery)	2.1 kg